




LIFTING AND TIPPING DEVICE
mobile, mechanical
type PM – R



Strojírna Pálava Maxima s.r.o.

DESÁTKOVÁ 124/15, 623 00 BRNO KOHOUTOVICE
Manufactory: TOVÁRNÍ 34, 679 32 SVITÁVKA, CZECH REPUBLIC
tel: +420 - 516 453 834, fax: +420 - 516 453 834
e-mail: info@s-palava.cz; www.s-palava.cz

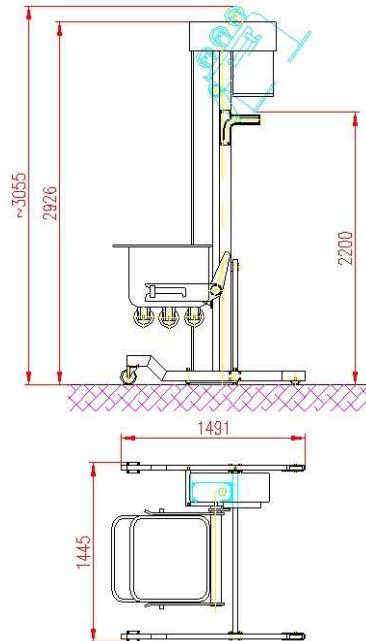


Device serves for lifting and tipping of 200 litres trolleys into the chosen processing device. Standard lift and tilt devices are built for 200 litres trolleys. For other type of trolley or lock is necessary to give a dimensional draft. Tipping height is determined by position of the slot link on the column. Slot link setting is possible to deliver according to the customer's wish. The whole device is made of stainless steel; the chain is also stainless steel.

Technical data

Tipping height – standard	2200 mm
Max. tilt angle	130°
Lifting speed	84 mm/sec
Load capacity	300 kg
Wattage	0.55 kW
Voltage	24 V / 50 Hz
Brutto weight	285 kg

Version:

frontal, left



frontal, right

